# HUMAN/MACHINE INTERFACES & MONITORS

# Marine Approved, High Quality, Rugged Metal Construction Display

The 29LM523003 Series of 52" LCD monitors has been designed primarily for external information applications in the maritime environment. They utilise WXGA TFT panels with KME designed mechanical enhancements to give superior image performance and ruggedness. The IP model provides additional sealing to IP65 in a rugged metal housing with glass protection making it suitable for sheltered outdoor applications.

Also available in sizes 40", 46" and 57" the high brightness and wide viewing angles enable superior image performance with rugged construction.

Full user controls are provided on the monitor head with the AC power supply integrated. The monitor is suitable for use with 16:9, 4:3 and 5:4 aspect ratio video; its multiple video inputs make it usable in a range of applications with simple interfacing to most video and data systems.

### **Features**

- Versatile Display Head
- IP65 sealed housing with protective sunscreen The front is sealed to IP65 rating for water and dust resistance
- Certified & Approved The marine range is designed to comply with EN 60945
- Inputs: All monitors have VGA (multi scanning), DVI and PAL
- Power 110-220V AC
- Widescreen (16:9) formats up to WSXGA resolution

# 52" Widescreen LCD Marine Head Monitor 29LM523003




# HUMAN/MACHINE INTERFACES & MONITORS

Specifications		
TFT Charateristics	Type Max. Resolution Active Display Area Response time Contrast Ratio* Brightness* Viewing angles (at CR>10) Backlight life Nr. of colours	52" a-Si AM TFT 1920 x 1080 pixels 1152 x 648 mm 8ms average, typical 1700:1 typical 600 cd/m² typical 175°H, 175°V 50,000 hrs typical 16.7 million
Synchronisation Range	Horizontal scan Vertical scan	30-70kHz 50 to 85Hz
Display modes	VESA support	640 x 480 VGA 800 x 600 SVGA 1024 x 768 XGA 1280 x 1024 SXGA 1360 x 768 1366 x 768 WXGA 1920 x 1080 (recommended)
Power supply / consumption	110/220V 50/60Hz / 420W (Max)	
Environmental	**Operating Temp Storage Temp Operating Humidity Storage Humidity Shock Vibration	-15 to +55 °C (IEC 60945 tests) -20 to +60 °C 30% to 90% (non condensing) 10% to 90% (non condensing) 10g, 11msec ½ sine +/-1mm, 2 to 13Hz: 0.7g, 13 to 100Hz
Dimensions	Monitor	1261 x 759 x 155 mm
	Weight	80 kg (approx)
Input Connectors	HD 15 D-Sub / BNC	
Sealing	IP65 on front	
Housing	Aluminium (Black finish)	
User controls	Rear mounted	
Approvals	ECDIS & Radar Compliance EMC & Safety	IEC 61174 - Designed to comply EN 60950 - Designed to comply
Part numbers		
Model	29LM523003/x	

Specifications are subject to change without notice. The /x version behind the partnumber indicates the version number. This version number may vary because of a different TFT panel being used.

\* Brightness and contrast refer to naked LCD panel.

<sup>\*\*</sup>Quoted EN60945 test. We do not recommend routine operation at extreme temperatures

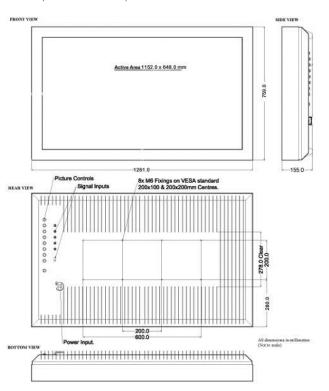

#### Monitors

Desktop Monitors Large screen Monitors Custom-made Monitors 19" Rack Mount Monitors Rear Mount Monitors Monitors for Panel Mount Monitors for VESA Mount Kiosks Accessories

#### Monitors – Specific applications

Stainless Steel Monitors
Car Displays
Marine Monitors
Military Monitors
Replacement Monitors
Train Monitors

#### • Panel PC's

High Performance Systems Custom made Panel PC's Low Power Systems Extreme environments

## Pointing devices

Accessories Touchpads Trackballs Trackball Modules Joysticks Custom made Pointing Devices

### Keyboards

Desktop Keyboards with or without pointer Built-in Keyboards with or without pointer Cables & Connectors Custom made Keyboards



Mulder-Hardenberg, est. 1927, is the answer to professional demands in the domain of electronic related environments. We don't just sell products. We use our multidiscipline knowledge to provide the best possible solution, designed to your specific interest.

### Contactdetails:

The Netherlands Mulder-Hardenberg B.V. Westerhoutpark 1a 2012 JL Haarlem Tel.: +31 23 531 91 84 infonl@m-h.biz

Belgium, France, Luxemburg Mulder-Hardenberg N.V. Hoge Weg 129 B-2940 Stabroek Belgium Tel.: +32 3 660 13 20 infobe@m-h.biz

Germany Mulder-Hardenberg GmbH Nordring 13 D-65719 Hofheim/Ts Tel.: +49 6192 - 97 91 85 infode@m-h.biz